

Series C

PULSAtron® Electronic Metering Pumps

Key Features:

- **Automatic Control** by external pacing with prime switch (optional)
- **Manual Control** by on-line adjustable stroke length (fixed stroke rate).
- **Liquid Low Level Option Available to Prevent Loss of Prime**
- **Agency approved** for demanding **OUTDOOR** and indoor applications.
- **Highly reliable** timing circuit.
Water resistant, for **OUTDOOR** installation.
- **Guided Ball Check Valve Systems**, to reduce back flow and enhance outstanding priming characteristics.
- **Premium Standard Wetted Component Materials.**
- **Few Moving Parts** and **Wall Mountable.**
- **Convenient Tank Systems** available.
- **Safe & Easy Priming** with durable leak-free **bleed valve assembly** (standard on most models).

Complete Economical Selection

Four distinct models are available, having pressure capabilities to 80 PSIG, and flow capacities to 30 GPD, with a turndown ratio of 10:1. Metering performance is reproducible to within $\pm 3\%$ of maximum capacity.

Please refer to the reverse side for Series C specifications.

Operating Benefits

Reliable metering performance. Our guided check valves, with their state-of-the-art seat and ball designs, provide precise seating, and excellent priming and suction lift characteristics. Our timing circuit is highly reliable and, by design, virtually unaffected by temperature, EMI and other electrical disturbances.

Rated “hot” for continuous duty. Series C pumps continue to meet their specifications for pressure and capacity even during extended use. That’s because our high quality solenoid and special enclosure that effectively dissipates heat.

High viscosity capability. A straight flow path and ample clearance between the diaphragm and head enable standard PULSAtron pumps to handle viscous chemicals up to a viscosity of 1000 CPS.

Leak-free, sealless, liquid end. Our diaphragms are of superior construction—teflon-faced, bonded to a composite of Hypalon and fabric layers, and reinforced with a metal insert for optimum flexibility and durability.

System Compatibility

A wide variety of chemicals can be pumped. Liquid end materials include glass-filled polypropylene (GFPP), PVC, styrene-acrylonitrile (SAN), Polyvinylidene Fluoride (PVDF), Teflon, Hypalon, Viton, ceramic alloys and 316SS.

Immediate installation and start-up. Included as standard accessories with all models are an injection/back pressure valve assembly and a foot valve/strainer assembly, including discharge and suction tubing.

Safe and easy priming and valve maintenance. Included as a standard accessory is a bleed valve assembly, including return tubing (available only on those models with tubing connections).

Quick and economical liquid end maintenance. Available for every model is a unique KOPkit®, a convenient, economically priced, package containing new cartridge check valves and other important spare parts.



For additional information about PULSAtron's full-featured Series E Plus, refer to Technical Sheet No. EMP-021, about the mid-range Series E and Series A Plus, refer to Technical Sheet No. EMP-022 and EMP-025 respectively. For information about the economical Series C Plus, refer to Technical Sheet No. EMP-026.

* SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

An ISO 9002 System-Certified Company
PULSAFEEDER
A Unit of IDEX Corporation
IDEX
IDEX CORPORATION

PULSAtron® Series C Specifications

Pressure and Flow Rate Capacity

Capacity, nominal	GPD	6	12	22	30
	GPH	0.25	0.50	0.91	1.25
	LPH	.95	1.89	3.47	4.73
Pressure, max PSIG/Bar					
	80/5.6	LC02	LC03	LC04	LC54


Important: Series C — 4 model selections. Digit 1 and 2 (LC) signify product class, digit 3 and 4 signify pressure/flow. For full model selection information refer to Price Schedule EMP-PS LX, or Reference Guide No. EMP-003

Liquid End Materials

Series	Pump Head	Diaphragm	Check Valves		Fittings	Bleed Valve	Injection Valve Assembly Foot Valve Assembly	Tubing
			Seats/O-rings	Balls				
C	GFPPL PVC SAN PVDF 316SS	Teflon-faced Hypalon-backed	Teflon, Hypalon, Viton	Ceramic, Teflon, 316SS, Alloy C	GFPPL PVC PVDF 316SS	Same as fitting and check valve selected, except 316SS	Same as fitting and check valve selected	Clear PVC White PE

Important: Material Code — GFPPL = Glass-filled Polypropylene, PVC = Polyvinyl Chloride, SAN = Styrene Acrylonitrile, PE = Polyethylene, PVDF = Polyvinylidene Fluoride. Teflon, Hypalon and Viton are registered trademarks of E.I. DuPont Company. PVC wetted end recommended for sodium hypochlorite.

Dimensions

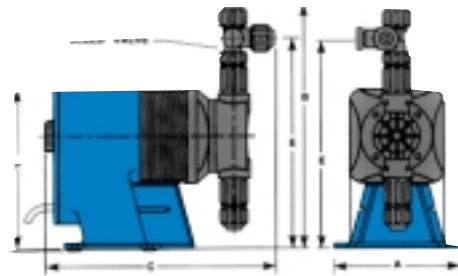

Series C Dimensions (inches)						
Model No.	A	B	C	D	E	Shipping Weight (lbs.)
LC02	5.0	9.6	9.5	6.5	8.2	10
LC03	5.0	9.9	9.5	6.5	8.5	10
LC04	5.0	9.9	9.5	6.5	8.5	10
LC54	5.0	9.9	9.5	6.5	8.5	10

Note: Inches x 2.54=cm


KOPkit®

Pulsafeeder has built a reputation for superior reliability by supplying carefully designed, high quality equipment. Even the best equipment, however, requires a minimal amount of maintenance. KOPkits are designed to guard against unnecessary downtime and assure you the highest level of efficient and uninterrupted service from our PULSAtron pumps. KOPkits contain recommended spare parts for those parts that usually require preventative maintenance. KOPkits immediately available in all wetted materials at very affordable prices.



For further KOPkit information refer to Technical Sheet No. EMP-002.

PULSAtron's Full Range of Electronic Metering Pumps.

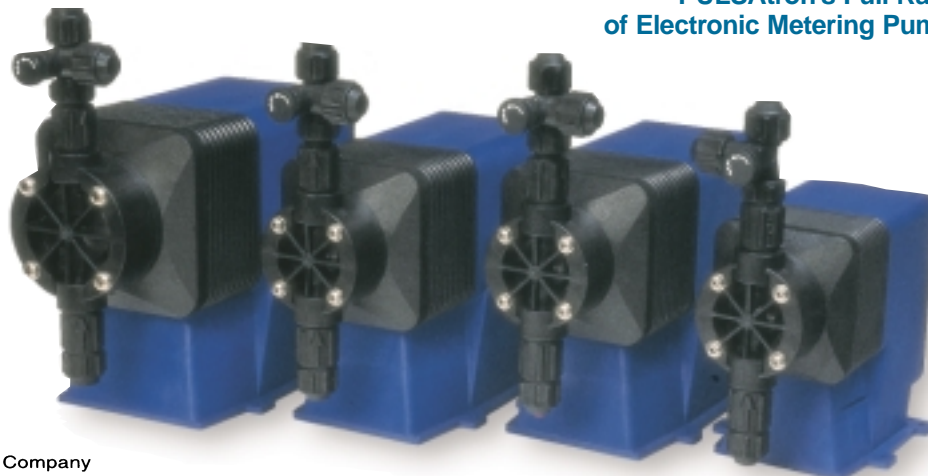

An ISO 9002 System-Certified Company

PULSAFEEDER

A Unit of IDEX Corporation



Standard Pump Operations

27101 Airport Road • Punta Gorda, Florida 33982
(941) 575-3800 • FAX (941) 575-4085 • FAX (800) 456-4085

Technical Sheet No. EMP-024
PULSAtron and Kopkit are
Trademarks of Pulsafeeder.

Printed in U.S.A. 2/98